


PERSONNEL AND MATERIAL HOIST



NOV 2032 UP I & NOV 2032 UP II


- Capacity 2000 kg (NOV 2032 UP I) counterweightless
- Capacity 2 x 2000 kg (NOV 2032 UP II) counterweightless
- Option: Frequency control
Overload detection
Cable trolley
C gate

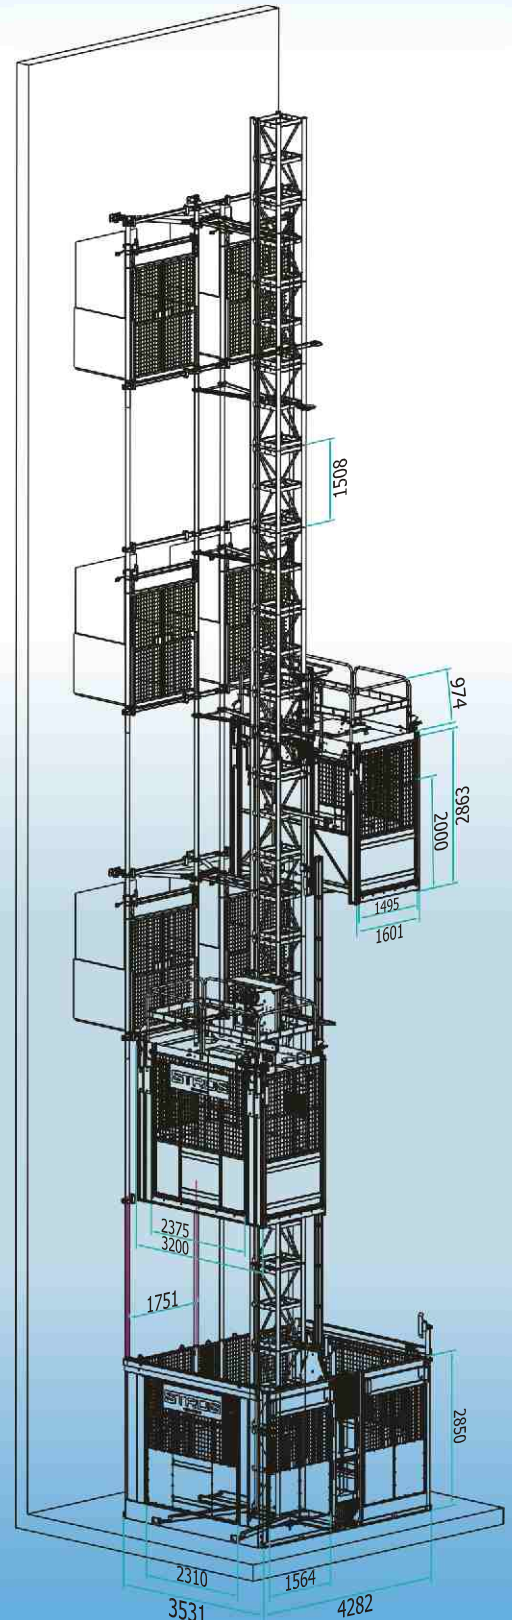

TECHNICAL DATA

Load capacity	NOV 2032 UP I	2000 kg
	NOV 2032 UP II	2 x 2000 kg
Rated speed		35 m/min
Recommended working height		150 m
Cage internal dimensions		3200 x 1475 mm
Cage internal height		2650 mm
Power supply system		3 PEN ~50-60 Hz 400-480 V/TN-C-S
Drive motor power - 100% ED		2 x 11 kW
Power supply fuses		63 A/D
Mast section length		1508 mm

- **Equipment** Landings: Bars or gates
Erection platform for erection of mast and anchors
Erection crane

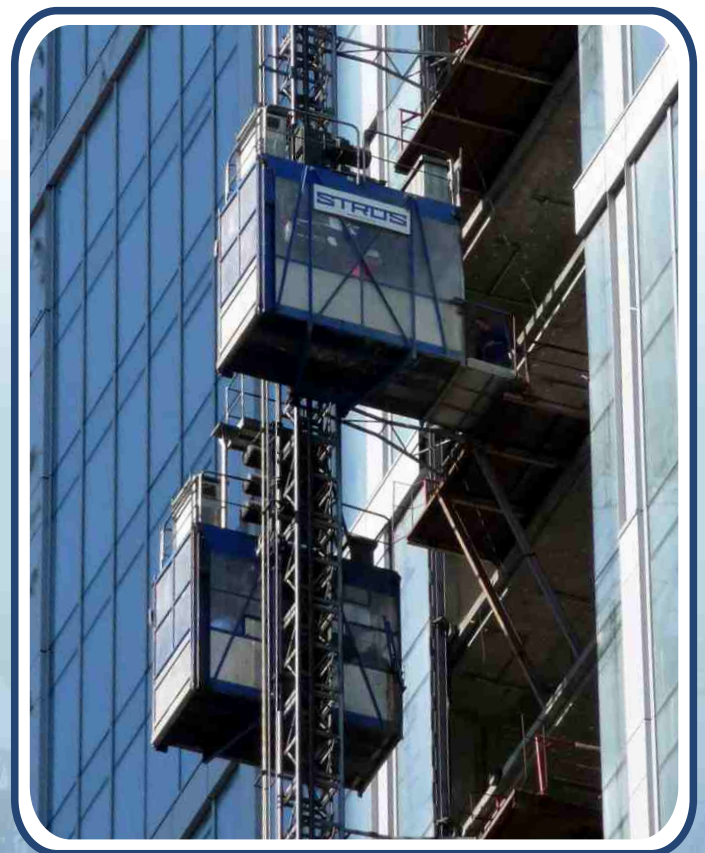

STROS®

Strojirenska 791, 264 01 Sedlcany, Czech Republic
phone: +420 318 842 402, fax: +420 318 821 230
e-mail: filipp@stros.cz, www.stros.cz